




IN THE MATTER OF
Patent Application of
HONDA GIKEN KOGYO
KABUSHIKI KAISHA

I, Shinichi MIZOI, of 1-9-23-203, Kamijujo Kita-ku, Tokyo 114-0034, Japan, do hereby declare that I am conversant with the Japanese and English languages and am a competent translator thereof. I further declare that to the best of my knowledge and belief, the following is a true and correct translation, made by me, of the official copy of the document in respect of a Patent Application No. 11-247790 filed in Japan on September 1, 1999.

Signed this 6th day of October, 2006

By


Shinichi MIZOI

(11-247790)

[Document Name] Patent Application

[Reference Number] PCB14641HT

[Date of Submission] September 1, 1999

[To] The commissioner of the Patent Office

[International Patent Classification] H01M 8/24

[Inventor]

[Domicile or Residence] c/o KABUSHIKI KAISHA HONDA
GIJYUTSU KENKYUSHO
4-1, Chuo 1-chome, Wako-shi,
Saitama-ken

[Name] Narutoshi SUGITA

[Inventor]

[Domicile or Residence] c/o KABUSHIKI KAISHA HONDA
GIJYUTSU KENKYUSHO
4-1, Chuo 1-chome, Wako-shi,
Saitama-ken

[Name] Noriaki OSAO

[Inventor]

[Domicile or Residence] c/o KABUSHIKI KAISHA HONDA
GIJYUTSU KENKYUSHO
4-1, Chuo 1-chome, Wako-shi,
Saitama-ken

[Name] Takeshi USHIO

[Applicant]

[Identification Number] 000005326

[Name] HONDA GIKEN KOGYO KABUSHIKI
KAISHA

(11-247790)

[Agent]

[Identification Number] 100077665
[Patent Attorney]
[Name] Yoshihiro CHIBA

[Selected Agent]

[Identification Number] 100077805
[Patent Attorney]
[Name] Tatsuhiko SATO

[Indication of Fees]

[Prepayment Register Number] 001834
[Amount of Payment] 21000

[List of the Attached Documents]

| | | |
|------------------------------------|---------------|---------|
| [Document Name] | Specification | 1 |
| [Document Name] | Drawings | 1 |
| [Document Name] | Abstract | 1 |
| [General Power of Attorney Number] | | 9711295 |

[Proof] necessary

11-247790

[DOCUMENT NAME] Specification

[TITLE OF THE INVENTION] FUEL CELL SYSTEM

[Claim]

[Claim 1]

A fuel cell system provided with fuel cell stacks each comprising a plurality of fuel cell units each composed of a solid polymer ion exchange membrane interposed between an anode electrode and a cathode electrode, said plurality of fuel cell units being stacked in a horizontal direction with separators intervening therebetween, said fuel cell system comprising:

said first and second fuel cell stacks which are arranged in parallel to one another in a stacking direction;

first and second electric power-deriving terminals one of which is a positive electrode, the other of which is a negative electrode, and which are disposed on mutually adjoining vertical surfaces at first ends of said first and second fuel cell stacks;

a fuel gas supply/discharge passage, an oxygen-containing gas supply/discharge passage, and a cooling medium supply/discharge passage which are provided symmetrically respectively in each of said first and second fuel cell stacks; and

a fuel gas supply port, a fuel gas discharge port, an oxygen-containing gas supply port, and an oxygen-containing gas discharge port which are provided symmetrically

respectively and which are disposed at upper and lower portions at both ends in a lateral direction on each of mutually adjoining vertical surfaces at second ends of said first and second fuel cell stacks, wherein a cooling medium supply port and a cooling medium discharge port are provided and disposed at inner positions in upper and lower directions and in right and left directions with respect to said fuel gas supply port, said fuel gas discharge port, said oxygen-containing gas supply port, and said oxygen-containing gas discharge port in said vertical surface at said second end.

[DETAILED EXPLANATION OF THE INVENTION]

[0001]

[TECHNICAL FIELD TO WHICH THE INVENTION PERTAINS]

The present invention relates to a fuel cell system provided with a fuel cell stack comprising a plurality of fuel cell units each composed of a solid polymer ion exchange membrane interposed between an anode electrode and a cathode electrode, the plurality of fuel cell units being stacked in the horizontal direction with separators intervening therebetween.

[0002]

[PRIOR ART]

For example, the solid polymer type fuel cell comprises a fuel cell unit including an anode electrode and a cathode electrode disposed opposingly on both sides of an ion exchange membrane composed of a polymer ion exchange

membrane (cation exchange membrane) respectively, the fuel cell unit being interposed between separators. Usually, the solid polymer type fuel cell is used as a fuel cell stack comprising a predetermined number of the fuel cell units and a predetermined number of the separators which are stacked with each other.

[0003]

In such a fuel cell stack, a fuel gas such as a hydrogen gas, which is supplied to the anode electrode, is converted into hydrogen ion on the catalyst electrode, and the ion is moved toward the cathode electrode via the ion exchange membrane which is appropriately humidified. The electron, which is generated during this process, is extracted for an external circuit, and the electron is utilized as DC electric energy. An oxygen-containing gas such as an oxygen gas or air is supplied to the cathode electrode. Therefore, the hydrogen ion, the electron, and the oxygen gas are reacted with each other on the cathode electrode, and thus water is produced.

[0004]

When the fuel cell stack as described above is intended to be carried on a vehicle or the like, a considerably large number of fuel cell units are necessary in order to obtain desired electric power. In such case, when a single fuel cell stack is intended to be constructed by stacking a considerable number of fuel cell units, the following inconvenience arises. That is, the length of the fuel cell

unit in the stacking direction is considerably lengthy, and it is impossible to uniformly supply the fuel gas to the respective fuel cell units.

In view of the above, a fuel cell system is adopted, which is constructed by preparing a plurality of fuel cell stacks and connecting the respective fuel cell stacks in series by the aid of a manifold. For example, in Japanese Laid-Open Patent Publication No. 8-171926, four stacks (fuel cell stacks) are prepared. Two of the stacks, which are arranged in two rows in the stacking direction respectively, are arranged in series by installing a supply/discharge member for the fuel and the like. The supply/discharge member for the fuel and the like is provided, at mutually opposing vertical surfaces at both ends, with holes for supplying/discharging the fuel and the like with respect to the two stacks respectively. Further, the supply/discharge member for the fuel and the like is formed with flow passages for making communication between the respective holes at the inside of the supply/discharge member for the fuel and the like.

[0005]

[TASK TO BE SOLVED BY THE INVENTION]

In the conventional technique described above, the respective two stacks are juxtaposed and arranged on both end surfaces of the supply/discharge member for the fuel and the like. A pressurizing mechanism is arranged on an end surface disposed on a side opposite to the supply/discharge

member for the fuel and the like of each of the stacks so that the stacks are pressurized in the stacking direction. Further, an upper case and a lower case are installed to upper and lower portions of the stack. Therefore, the following problem is pointed out. That is, the assembling operation for the entire fuel cell is complicated, and the arrangement of the supply/discharge member for the fuel and the like is considerably complicated. The supply/discharge member for the fuel and the like has a large size and a complicated structure, and the production cost is expensive.

[0006]

The present invention solves this kind of problem and its object is to provide a fuel cell system comprising two fuel cell stacks arranged in parallel, which makes it possible to simplify the piping structure for supplying and discharging fluids such as a fuel gas to the respective fuel cell stacks, and effectively suppress the dimension in the height direction of the fuel cell stack to be low.

[0007]

[SOLUTION FOR THE TASK]

A fuel cell system according to claim 1 of the present invention comprises a fuel gas supply/discharge passage, an oxygen-containing gas supply/discharge passage, and a cooling medium supply/discharge passage which are provided symmetrically respectively in each of first and second fuel cell stacks which are arranged in parallel to one another, and a fuel gas supply port, a fuel gas discharge port, an

oxygen-containing gas supply port, and an oxygen-containing gas discharge port which are disposed at upper and lower portions at both ends in a lateral direction and provided symmetrically respectively on each of mutually adjoining vertical surfaces at second ends of the first and second fuel cell stacks. Further, a cooling medium supply port and a cooling medium discharge port are provided at inner positions in upper and lower directions and in right and left directions with respect to the fuel gas supply port, the fuel gas discharge port, the oxygen-containing gas supply port, and the oxygen-containing gas discharge port.

[0008]

As described above, since each of the supply/discharge passages of the first and second fuel cell stacks are provided symmetrically to one another, the identical supply port/discharge ports are provided at upper and lower portions at both ends on each of mutually adjoining vertical surfaces on each of mutually adjoining vertical surfaces at second ends of the first and second fuel cell stacks. Thus, the manifold structure for connecting the first and second fuel cell stacks is easily simplified. Further, the supply/discharge ports for the fuel gas, the oxygen-containing gas, and the cooling medium are provided on the identical vertical surfaces of the first and second fuel cell stacks. The following advantage is obtained. That is, since it is possible to concentrate the piping on one surface (vertical surface), the operability for the piping

is effectively improved.

[0009]

Further, on vertical surfaces at second ends of the first and second fuel cell stacks, only the supply/discharge ports for the fuel gas and the oxygen-containing gas are provided at upper and lower portions at both ends in a lateral direction, and the supply/discharge ports for the cooling medium are provided at inner positions of the supply/discharge ports for the fuel gas and the oxygen-containing gas. Accordingly, the dimension in the height direction of the first and second fuel cell stacks can be effectively shortened and it is possible to effectively utilize the upper space of the first and second fuel cell stacks and, for instance, it is possible to effectively use as a vehicle-carried type fuel cell system.

[0010]

[MODE FOR CARRYING OUT THE INVENTION]

FIG. 1 shows a schematic perspective view illustrating a fuel cell system 10 according to an embodiment of the present invention, and FIG. 2 shows a side view illustrating the fuel cell system 10.

[0011]

The fuel cell system 10 comprises a first fuel cell stack 12 and a second fuel cell stack 14 which are arranged in parallel to one another in the horizontal direction (direction of the arrow A). A first electric power-deriving terminal 20 as a positive electrode, and a second electric

power-deriving terminal 22 as a negative electrode are provided on first end plates 16, 18 which constitute vertical surfaces disposed at first ends on an identical side of the first and second fuel cell stacks 12, 14 respectively.

[0012]

A piping mechanism 28, which is used to supply and discharge a fuel gas, an oxygen-containing gas, and a cooling medium with respect to the first and second fuel cell stacks 12, 14, is incorporated on a side of second end plates 24, 26 which constitute vertical surfaces disposed at second ends on another identical side of the first and second fuel cell stacks 12, 14 respectively. The first and second fuel cell stacks 12, 14 are fixed to an attachment plate 31 which constitutes a vehicle, by the aid of an attachment mechanism 30.

[0013]

As shown in FIGS. 3 and 4, the first fuel cell stack 12 comprises a fuel cell unit 32, and first and second separators 34, 36 for supporting the fuel cell unit 32 interposed therebetween. A plurality of sets of these components are stacked with each other in the horizontal direction (direction of the arrow A). The first fuel cell stack 12 has a rectangular parallelepiped-shaped configuration as a whole. The first fuel cell stack 12 is arranged such that the short side direction (direction of the arrow B) is directed in the direction of the gravity,

and the long side direction (direction of the arrow C) is directed in the horizontal direction.

[0014]

The fuel cell unit 32 includes a solid polymer ion exchange membrane 38, and a cathode electrode 40 and an anode electrode 42 which are arranged with the ion exchange membrane 38 intervening therebetween. First and second gas diffusion layers 44, 46, each of which is composed of, for example, porous carbon paper as a porous layer, are arranged for the cathode electrode 40 and the anode electrode 42.

[0015]

First and second gaskets 48, 50 are provided on both sides of the fuel cell unit 32. The first gasket 48 has a large opening 52 for accommodating the cathode electrode 40 and the first gas diffusion layer 44. The second gasket 50 has a large opening 54 for accommodating the anode electrode 42 and the second gas diffusion layer 46. The fuel cell unit 32 and the first and second gaskets 48, 50 are interposed between the first and second separators 34, 36.

[0016]

The first separator 34 is designed such that each of the surface 34a opposed to the cathode electrode 40 and the surface 34b disposed on the opposite side has a rectangular configuration. For example, the first separator 34 is arranged such that the long side 55a is directed in the horizontal direction, and the short side 55b is directed in the direction of the gravity.

[0017]

An oxygen-containing gas inlet 56a for allowing the oxygen-containing gas such as an oxygen gas or air to pass therethrough, and a fuel gas inlet 58a for allowing the fuel gas such as a hydrogen gas to pass therethrough, each of which has a lengthy shape in the vertical direction, are provided at upper portions of both end edges of the short sides 55b of the first separator 34 respectively. An oxygen-containing gas outlet 56b and a fuel gas outlet 58b, each of which has a lengthy shape in the vertical direction, are provided so that they are disposed at diagonal positions with respect to the oxygen-containing gas inlet 56a and the fuel gas inlet 58a at lower portions of both end edges of the short sides 55b of the first separator 34 respectively.

[0018]

Four cooling medium inlets 60a to 60d, which are lengthy in the direction of the arrow C, are provided at lower end portions of the long side 55a of the first separator 34. Similarly, four cooling medium outlets 60e to 60h, which are lengthy in the direction of the arrow C, are provided at upper portions on the long side 55a of the first separator 34. The cooling medium such as pure water, ethylene glycol, and oil is supplied to the cooling medium inlets 60a to 60d. Ten first oxygen-containing gas flow passage grooves 62, which communicate with the oxygen-containing gas inlet 56a and which are independent from each other, are provided in the direction of the gravity while

meandering in the horizontal direction on the surface 34a of the first separator 34. The first oxygen-containing gas flow passage grooves 62 are merged into five second oxygen-containing gas flow passage grooves 65. The second oxygen-containing gas flow passage grooves 65 communicate with the oxygen-containing gas outlet 56b. Holes 63 for inserting tie rods therethrough are formed at six portions of the first separator 34.

[0019]

The second separator 36 is formed to have a rectangular configuration. An oxygen-containing gas inlet 66a and a fuel gas inlet 68a are formed to penetrate through upper portions of both end edges on the short side 64b of the second separator 36 respectively. An oxygen-containing gas outlet 66b and a fuel gas outlet 68b are formed to penetrate through lower portions of both end edges thereof so that they are disposed at diagonal positions with respect to the oxygen-containing gas inlet 66a and the fuel gas inlet 68a respectively.

[0020]

Four cooling medium inlets 70a to 70d, which are lengthy in the direction of the arrow C, are formed to penetrate through lower portions on the long side 64a of the second separator 36. Similarly, cooling medium outlets 70e to 70h, which are lengthy in the direction of the arrow C, are formed to penetrate through upper portions on the long side 64a.

[0021]

As shown in FIG. 5, ten first fuel gas flow passage grooves 72, which communicate with the fuel gas inlet 68a, are formed on the surface 36a of the second separator 36. The first fuel gas flow passage grooves 72 merged into five second fuel gas flow passage grooves 73. The second fuel gas flow passage grooves 73 communicate with the fuel gas outlet 68b.

[0022]

As shown in FIG. 6, cooling medium flow passages 74a to 74d, which individually communicate with the cooling medium inlets 70a to 70d and the cooling medium outlets 70e to 70h respectively, are provided in the direction of the gravity on the surface 36b disposed on the side opposite to the surface 36a of the second separator 36. Each of the cooling medium flow passages 74a to 74d is provided with nine first flow passage grooves 76a, 76b which communicate with the cooling medium inlet 70a to 70d and the cooling medium outlet 70e to 70h. Two second flow passage grooves 78, which are parallel to one another in the direction of the gravity and which are separated from each other by predetermined spacing distances, are provided between each of the first flow passage grooves 76a, 76b. In the second separator 36, holes 63 for inserting tie rods therethrough are provided at six portions in the same manner as the first separator 34.

[0023]

As shown in FIG. 7, a terminal plate 80 and a first conductive plate 82, which serve as terminal plates, are arranged at both ends in the stacking direction of the fuel cell units 32 which are stacked as a predetermined number of individuals. A first end plate 16 is stacked on the terminal plate 80 with an insulating plate 84 intervening therebetween. A first electric power-deriving terminal 20 is installed to the terminal plate 80.

[0024]

As shown in FIG. 8, the first electric power-deriving terminal 20 includes screw sections 88a, 88b having a small diameter provided at both ends of a columnar large diameter section 86. The screw section 88a passes through a hole 90 formed through the terminal plate 80, and it protrudes into the inside of the oxygen-containing gas inlet 56a of the first separator 34. A nut member 92 is screwed to the screw section 88a. A seal member 94 for improving the sealing performance with respect to the terminal plate 80 is installed on a shoulder of the large diameter section 86. An insulating ring 98 is installed between the outer circumference of the large diameter section 86 and the hole 96 formed through the first end plate 16.

[0025]

As shown in FIG. 9, the first conductive plate 82 is designed to have approximately the same shape as that of the second separator 36, i.e., have a rectangular configuration. An oxygen-containing gas inlet 100a, a fuel gas inlet 102a,

an oxygen-containing gas outlet 100b, and a fuel gas outlet 102b are provided at mutually diagonal positions respectively at both end edge portions on the short side. Four cooling medium inlets 104a to 104d and four cooling medium outlets 104e to 104h are provided at lower and upper portions on the long side of the first conductive plate 82 respectively. Holes 63 for inserting tie rods therethrough are formed at six positions.

[0026]

A first connecting plate section 106, which is disposed under the first fuel cell stack 12 and which extends closely to the second fuel cell stack 14, is provided for the first conductive plate 82. Two bolt sections 108a, 108b, which protrude downwardly, are provided for the first connecting plate section 106. Each of the bolt sections 108a, 108b and the first conductive plate 82 is composed of a material having conductivity, for example, stainless steel or copper. As shown in FIG. 7, a second end plate 24 is stacked over the first conductive plate 82 with an insulating plate 110, a lid plate 112, and a seal member 114 intervening therebetween.

[0027]

As shown in FIGS. 10 and 11, the second end plate 24 is constructed to have a rectangular configuration. An oxygen-containing gas inlet 120a and a fuel gas inlet 122a are formed to penetrate through upper portions of both end edges on the short side. An oxygen-containing gas outlet 120b and

a fuel gas outlet 122b are provided at lower portions of both end edges on the short side so that they are disposed at diagonal positions with respect to the oxygen-containing gas inlet 120a and the fuel gas inlet 122a respectively.

[0028]

First cooling medium flow passage grooves 124a to 124d which communicate with the cooling medium inlets 70a to 70d of the second separator 36, and second cooling medium flow passage grooves 124e to 124h which communicate with the cooling medium outlets 70e to 70h of the second separator 36 are provided on the inner surface 24a of the second end plate 24 so that they are lengthy in the horizontal direction and each of them has a predetermined depth. Each of the first cooling medium flow passage grooves 124a to 124d communicates with ends of twelve first grooves 126a. The first grooves 126a extend upwardly in parallel to one another. After that, two of the first grooves 126a are merged into each of second grooves 126b. Two of the second grooves 126b are merged into each of third grooves 126c which communicate with a cooling medium-introducing port 128.

[0029]

Similarly, each of the second cooling medium flow passage grooves 124e to 124h communicates with twelve first grooves 130a. The first grooves 130a extend vertically downwardly, and two of them are merged into each of second grooves 130b. Two of the second grooves 130b are merged

into each of third grooves 130c which communicate with a cooling medium discharge port 132. As shown in FIG. 10, a supply tube passage 134 and a discharged tube passage 136 are connected to the cooling medium supply port 128 and the cooling medium discharge port 132 respectively. Each of the supply tube passage 134 and the discharge tube passage 136 protrudes by a predetermined length outwardly from the first fuel cell stack 12. Holes 63 for inserting tie rods therethrough are formed at six positions of the second end plate 24.

[0030]

Those provided in the first fuel cell stack 12 are an oxygen-containing gas supply/discharge passage 138a which makes communication for the oxygen-containing gas inlet 120a of the second end plate 24, the oxygen-containing gas inlet 56a and the oxygen-containing gas outlet 56b of the first separator 34, and the oxygen-containing gas outlet 120b of the second end plate 24 and which is constructed to have a U-shaped configuration, a fuel gas supply/discharge passage 138b which makes communication for the fuel gas inlet 122a of the second end plate 24, the fuel gas inlet 68a and the fuel gas outlet 68b of the second separator 36, and the fuel gas outlet 122b of the second end plate 24 and which is constructed to have a U-shaped configuration, and a cooling medium supply/discharge passage 138c which makes communication for the supply tube passage 134 of the second end plate 24, the cooling medium inlets 70a to 70d and the

cooling medium outlets 70e to 70h of the second separator 36, and the discharge tube passage 136 of the second end plate 24 and which is constructed to have a U-shaped configuration.

[0031]

As shown in FIGS. 10 and 13, the cooling medium supply port 128 and the cooling medium discharge port 132 are provided and disposed in the surface of the second end plate 24, i.e., at inner positions in the upper and lower directions and in the right and left directions with respect to the oxygen-containing gas inlet 120a, the fuel gas inlet 122a, the oxygen-containing gas outlet 120b, and the fuel gas outlet 122b.

[0032]

As shown in FIG. 7, the first fuel cell stack 12 is integrally tightened and fixed in the stacking direction (direction of the arrow A) by the aid of a tightening mechanism 140. The tightening mechanism 140 comprises a liquid chamber 142 which is provided on the outer surface side of the first end plate 16, a non-compressive liquid for applying the surface pressure, for example, silicone oil 144 which is enclosed in the liquid chamber 142, and three belleville springs 146a to 146c which are provided on the outer surface side of the second end plate 24 and which are arranged by being separated from each other by predetermined spacing distances in the horizontal direction in order to press the second end plate 24 toward the first end plate 16.

[0033]

A backup plate 148 is arranged opposingly to the first end plate 16 with the liquid chamber 142 intervening therebetween. The liquid chamber 142 is constructed between the backup plate 148 and a thin plate 150 made of aluminum or stainless steel. The belleville springs 146a to 146c are arranged while being separated from each other by substantially equal spacing distances on the surface of the second end plate 24, and they are supported by an attachment plate 152. Six tie rods 154 are inserted from the attachment plate 152 to the backup plate 148 to penetrate through the first fuel cell stack 12. Nuts 156 are screwed into ends of the tie rods 154. Accordingly, the first fuel cell stack 12 is held in an integrated manner.

[0034]

As shown in FIGS. 2 and 12, the attachment mechanism 30 comprises bracket sections 160a, 160b which are provided integrally on the lower side of the first end plate 16, and mount brackets 162a, 162b which are fastened by screws on the lower side of the second end plate 24. Long holes 164a, 164b, which are lengthy in the stacking direction (direction of the arrow A) of the first fuel cell stack 12, are formed in the bracket sections 160a, 160b respectively. On the other hand, holes 166a, 166b are formed in the mount brackets 162a, 162b respectively.

[0035]

Rubber mounts 168 are arranged for the long holes 164a,

164b and the holes 166a, 166b respectively. The rubber mount 168 is provided with upper and lower screw sections 170a, 170b. A collar 172 is arranged for the screw section 170a which protrudes at the upper portion. The collar 172 is inserted into the long hole 164a, 164b therefrom, and a nut 174 is screwed to the screw section 170a. On the side of the mount bracket 162a, 162b, the screw section 170a of the rubber mount 168 is inserted into the hole 166a, 166b, and a nut 174 is screwed to the forward end thereof. The screw sections 170b, which protrude on the lower side of the rubber mounts 168, are inserted into the attachment plate 31, and nuts 176 are screwed thereto. Accordingly, the first fuel cell stack 12 is fixed to the vehicle or the like.

[0036]

As shown in FIG. 13, the second fuel cell stack 14 is constructed symmetrically with respect to the first fuel cell stack 12 described above. The cathode electrode 40 and the anode electrode 42 are arranged on opposite sides with respect to the ion exchange membrane 38. The second electric power-deriving terminal 22, which serves as a negative electrode, is provided on the side of the first end plate 18 (see FIG. 14). The second fuel cell stack 14 is basically constructed in the same manner as the first fuel cell stack 12. The same constitutive components are designated by the same reference numerals, detailed explanation of which will be omitted.

[0037]

As shown in FIG. 15, the second fuel cell stack 14 is provided with a second conductive plate 180. The second conductive plate 180 is provided with a second connecting plate section 182 which extends under the second fuel cell stack 14 and which is disposed closely to the first connecting plate section 106 of the first conductive plate 82 provided for the first fuel cell stack 12. A pair of bolt sections 108a, 108b, 184a, 184b are provided for each of the first and second connecting plate sections 106, 182.

[0038]

Flexible connectors, for example, strand wires 186a, 186b are connected to the bolt sections 108a, 184a and the bolt sections 108b, 184b respectively. The strand wire 186a, 186b is constructed by twisting a large number of thin conductive wires into a net-shaped configuration. The strand wires 186a, 186b are covered with rubber covers 188a, 188b respectively.

[0039]

As shown in FIG. 13, the fuel gas inlet 122a and the oxygen-containing gas outlet 120b are arranged at the mutually close positions on the second end plates 24, 26 for constructing the first and second fuel cell stacks 12, 14 respectively. The piping mechanism 28 is incorporated into the second end plates 24, 26.

[0040]

As shown in FIGS. 1 and 16, the piping mechanism 28 is

provided with a first bracket 190 which covers the respective fuel gas inlets 122a of the second end plates 24, 26 for constructing the first and second fuel cell stacks 12, 14 arranged in parallel to one another and which is integrally fixed to the second end plates 24, 26. The first bracket 190 is provided with fuel gas supply tubes 192a, 192b which communicate with the respective fuel gas inlets 122a respectively. The fuel gas supply tubes 192a, 192b are merged to make communication with a fuel gas supply port 194.

[0041]

A second bracket 196 is fixed to the second end plates 24, 26, while covering the respective oxygen-containing gas outlets 120b. Forward ends of oxygen-containing gas discharge tubes 198a, 198b communicating with the oxygen-containing gas outlets 120b provided in the second bracket 196 respectively communicate with an oxygen-containing gas discharge port 200 in an integrated manner.

[0042]

Third and fourth brackets 202, 204 are fixed to the second end plates 24, 26, while covering the respective oxygen-containing gas inlets 120a and the fuel gas outlets 122b. Both ends of an oxygen-containing gas supply tube 206, which communicate with the oxygen-containing gas inlets 120a, communicate with the third and fourth brackets 202, 204. An oxygen-containing gas supply port 208 is provided at an intermediate portion of the oxygen-containing gas

supply tube 206. Both ends of a fuel gas discharge tube 210, which communicate with the fuel gas outlets 122b, communicate with the third and fourth brackets 202, 204. A fuel gas discharge port 212 is provided at an intermediate portion of the fuel gas discharge tube 210.

[0043]

Both ends of a cooling medium supply tube 214 are connected to the respective supply tube passages 134 provided on the second end plates 24, 26. The cooling medium supply tube 214 is provided with a cooling medium supply port 216. A cooling medium discharge tube 218 is connected to the respective discharge tube passages 136 provided on the second end plates 24, 26. The cooling medium discharge tube 218 is provided with a cooling medium discharge port 220.

[0044]

The operation of the fuel cell system 10 constructed as described above will be explained below.

[0045]

As shown in FIG. 1, the fuel gas (for example, a hydrogen-containing gas obtained by reforming hydrocarbon) is supplied from the fuel gas supply port 194 for constructing the fuel gas supply/discharge passage 138b, to the fuel cell system 10. The air or the oxygen gas (hereinafter simply referred to as "air") as the oxygen-containing gas is supplied to the oxygen-containing gas supply port 208 for constructing the oxygen-containing gas

supply/discharge passage 138a. The cooling medium is supplied to the cooling medium supply port 216 for constructing the cooling medium supply/discharge passage 138c.

[0046]

The fuel gas, which is supplied to the fuel gas supply port 194, passes through the fuel gas supply tubes 192a, 192b, and it is fed to the respective fuel gas inlets 122a of the second end plates 24, 26 for constructing the first and second fuel cell stacks 12, 14. The fuel gas is introduced into the first fuel gas flow passage grooves 72 from the respective fuel gas inlets 68a of the second separators 36. As shown in FIG. 5, the fuel gas, which is supplied to the first fuel gas flow passage grooves 72, is moved in the direction of the gravity while meandering in the horizontal direction along the surface 36a of the second separator 36.

[0047]

During this process, the hydrogen gas in the fuel gas passes through the second gas diffusion layer 46, and it is supplied to the anode electrode 42 of the fuel cell unit 32. The fuel gas, which is not used, is supplied to the anode electrode 42 while moving along the first gas flow passage grooves 72. The fuel gas, which is not used, is discharged from the fuel gas outlet 68b via the second fuel gas flow passage grooves 73. The fuel gas, which is not used, passes through the respective fuel gas outlets 122b of the second

end plates 24, 26, and it is introduced into the fuel gas discharge tube 210. The fuel gas is discharged from the fuel cell system 10 via the fuel gas discharge port 212.

[0048]

On the other hand, the air, which is supplied to the oxygen-containing gas supply port 208, is fed to the respective oxygen-containing gas inlets 120a provided for the second end plates 24, 26 via the oxygen-containing gas supply tube 206. The air is further supplied to the oxygen-containing gas inlets 56a of the first separators 34 incorporated into the first and second fuel cell stacks 12, 14 (see FIG. 3). In the first separator 34, the air, which is supplied to the oxygen-containing gas inlet 56a, is introduced into the first oxygen-containing gas flow passage grooves 62 in the surface 34a. The air is moved in the direction of the gravity while meandering in the horizontal direction along the first oxygen-containing gas flow passage grooves 62.

[0049]

During this process, the oxygen gas in the air is supplied from the first gas diffusion layer 44 to the cathode electrode 40. On the other hand, the air, which is not used, is discharged from the oxygen-containing gas outlet 56b via the second oxygen-containing gas flow passage grooves 65. The air, which is discharged to the oxygen-containing gas outlets 56b, passes through the oxygen-containing gas outlets 120b provided for the second end

plates 24, 26, and it is discharged from the oxygen-containing gas discharge port 200 via the oxygen-containing gas discharge tubes 198a, 198b (see FIG. 1).

[0050]

Accordingly, the electric power is generated in the first and second fuel cell stacks 12, 14. The electric power is supplied to a load, for example, an unillustrated motor to be connected between the first and second electric power-deriving terminals 20, 22 which have the mutually different characteristics.

[0051]

The interior of the first and second fuel cell stacks 12, 14 is effectively cooled by the cooling medium. That is, the cooling medium, which is supplied to the cooling medium supply port 216, is introduced into the supply tube passages 134 provided for the second end plates 24, 26 from the cooling medium supply tube 214. As shown in FIG. 11, the cooling medium is introduced into the cooling medium supply port 128 of the second end plates 24, 26. The cooling medium is fed from the plurality of second grooves 126b via the first grooves 126a to the first cooling medium flow passage grooves 124a to 124d.

[0052]

The cooling medium, which is introduced into the first cooling medium flow passage grooves 124a to 124d, is introduced into the cooling medium inlets 70a to 70d formed on the lower side of the second separator 36. As shown in

FIG. 6, the cooling medium is moved from the lower side to the upper side through the cooling medium flow passages 74a to 74d which communicate with the cooling medium inlets 70a to 70d. The cooling medium, which has passed through the cooling medium flow passages 74a to 74d to cool the respective fuel cell units 32, passes through the cooling medium outlets 70e to 70h, and it is introduced into the second cooling medium flow passage grooves 124e to 124h of the second end plates 24, 26 (see FIG. 11). The cooling medium, which is introduced into the second cooling medium flow passage grooves 124e to 124h, is fed from the first grooves 130a via the second grooves 130b to the cooling medium outlet 132. The cooling medium passes through the discharge tube passage 136, and it is discharged from the cooling medium discharge port 220 via the cooling medium discharge tube 218.

[0053]

In the present embodiment, as shown in FIG. 13, the oxygen-containing gas supply/discharge passage 138a, the fuel gas supply/discharge passage 138b, and the cooling medium supply/discharge passage 138c are provided in the first fuel cell stack 12. The oxygen-containing gas supply/discharge passage 138a, the fuel gas supply/discharge passage 138b, and the cooling medium supply/discharge passage 138c are provided in the second fuel cell stack 14 symmetrically to the first fuel cell stack 12 described above. Further, the oxygen-containing gas inlet 120a, the

fuel gas inlet 122a, the oxygen-containing gas outlet 120b, and the fuel gas outlet 122b are provided symmetrically to one another while being disposed at the upper and lower portions at both ends in the lateral direction (direction of the arrow C), for the second end plates 24, 26 which serve as the identical vertical surface of the first and second fuel cell stacks 12, 14.

[0054]

Accordingly, as shown in FIGS. 1 and 16, the following effect is obtained. That is, the fuel gas supply tubes 192a, 192b for making communication between the respective fuel gas inlets 122a of the second end plates 24, 26, and the oxygen-containing gas discharge tubes 198a, 198b for making communication between the respective oxygen-containing gas outlets 120b can be constructed to be short as much as possible. It is possible to effectively simplify the entire piping mechanism 28. Further, the supply tube passages 134 and the discharge tube passages 136 are provided for the second end plates 24, 26. The following advantage is obtained. That is, the piping operation for the oxygen-containing gas, the fuel gas, and the cooling medium is effected in a concentrated manner on one surface. The operability for the piping is effectively improved.

[0055]

In the present embodiment, the oxygen-containing gas inlet 120a, the fuel gas inlet 122a, the oxygen-containing gas outlet 120b, and the fuel gas outlet 122b are provided

at the upper and lower portions at both ends in the lateral direction in the surface of each of the second end plates 24, 26. The cooling medium supply port 128 and the cooling medium discharge port 132 are provided at the positions disposed inwardly in the upper and lower directions and in the right and left directions (see FIG. 13). Accordingly, it is possible to shorten the dimension in the height direction (direction of the arrow B) of the second end plate 24, 26 as much as possible. The fuel cell system 10 can be designed to have the low height.

[0056]

In this arrangement, the first and second electric power-deriving terminals 20, 22 are provided on the vertical surface on the side of the first end plates 16, 18 of the first and second fuel cell stacks 12, 14. No projection such as a connecting terminal exists on the upper side of the fuel cell system 10. Therefore, the fuel cell system 10 is thin-walled as much as possible. The upper portion of the fuel cell system 10 is constructed to be flat, and it is possible to effectively utilize the space on the upper side. It is possible to effectively use the fuel cell system 10 especially for being carried on the vehicle.

[0057]

In the present embodiment, the piping operation is performed for the piping mechanism 28 on the side of the second end plates 24, 26 after assembling the first and second fuel cell stacks 12, 14. Accordingly, the following

effect is obtained. That is, the assembling operability is improved all at once for the entire fuel cell system 10. It is possible to assemble the fuel cell system 10 efficiently in a short period of time.

[0058]

[EFFECT OF THE INVENTION]

Further, in the fuel cell system according to the present invention, the supply/discharge passages for the fuel gas and the like are provided symmetrically to one another in the first and second fuel cell stacks. The supply/discharge ports for the fuel gas and the oxygen-containing gas, which are disposed at the upper and lower portions at both ends in the lateral direction, are provided symmetrically to one another on the mutually adjoining vertical surfaces. The supply/discharge ports for the cooling medium are provided and disposed at the inner positions in the upper and lower directions and in the right and left directions. Accordingly, the dimension in the height direction of the fuel cell stack can be effectively shortened. It is possible to effectively utilize the space on the upper side of the fuel cell system. Further, the supply/discharge ports for the fuel gas, the oxygen-containing gas, and the cooling medium are provided symmetrically on the identical vertical surfaces of the first and second fuel cell stacks. Therefore, the piping operation is simplified, and it is easy to simplify the manifold structure.

[BRIEF DESCRIPTION OF THE DRAWINGS]

[FIG. 1]

FIG. 1 shows a schematic perspective view illustrating a fuel cell system according to an embodiment of the present invention.

[FIG. 2]

FIG. 2 shows a side view illustrating the fuel cell system.

[FIG. 3]

FIG. 3 shows an exploded perspective view illustrating major components of the fuel cell stack for constructing the fuel cell system.

[FIG. 4]

FIG. 4 shows a vertical sectional view illustrating major components of the fuel cell stack.

[FIG. 5]

FIG. 5 shows a front view illustrating a first surface of a second separator for constructing the fuel cell stack.

[FIG. 6]

FIG. 6 shows a front view illustrating a second surface of the second separator.

[FIG. 7]

FIG. 7 shows a schematic vertical sectional view illustrating the fuel cell stack.

[FIG. 8]

FIG. 8 illustrates a connection structure of an electric power-deriving terminal for constructing the fuel

cell stack.

[FIG. 9]

FIG. 9 shows a perspective view illustrating a conductive plate for constructing the fuel cell stack.

[FIG. 10]

FIG. 10 illustrates flow passages depicting the flows of fluids in the fuel cell stack.

[FIG. 11]

FIG. 11 shows a front view illustrating an inner surface of a second end plate for constructing the fuel cell stack.

[FIG. 12]

FIG. 12 shows a plan view illustrating the fuel cell stack.

[FIG. 13]

FIG. 13 shows a front view illustrating the fuel cell system in a state in which a piping mechanism is omitted from the illustration.

[FIG. 14]

FIG. 14 shows a back view illustrating the fuel cell system.

[FIG. 15]

FIG. 15 shows a perspective view illustrating the lower side of the fuel cell system.

[FIG. 16]

FIG. 16 shows a front view illustrating the fuel cell system.

[DESCRIPTION OF REFERENCE NUMERALS]

10: fuel cell system
12, 14: fuel cell stack
16, 18, 24, 26: end plate
20, 22: electric power-deriving terminal
28: piping mechanism
30: attachment mechanism
32: fuel cell unit
34, 36: separator
38: ion exchange membrane
40: cathode electrode
42: anode electrode
56a, 66a, 100a, 120a: oxygen-containing gas inlet
56b, 66b, 100a, 120a: oxygen-containing gas outlet
58a, 68a, 102a, 122a: fuel gas inlet
58b, 68b, 102b, 122b: fuel gas outlet
60a-60d, 70a-70d, 104a-104d: cooling medium inlet
60e-60h, 70e-70h, 104e-104h: cooling medium outlet
72, 65: oxygen-containing gas flow passage groove
72, 73: fuel gas flow passage groove
74a-74d: cooling medium flow passage
80: terminal plate
82, 180: conductive plate
106, 182: connecting plate section
124a-124h: cooling medium flow passage groove
128: cooling medium supply port
132: cooling medium discharge port

134: supply tube passage
136: discharge tube passage
138a: oxygen-containing gas supply/discharge passage
138b: fuel gas supply/discharge passage
138c: cooling medium supply/discharge passage
140: tightening mechanism
142: liquid chamber
146a-146c: belleville spring
160a, 160b: bracket section
162a, 162b: mount bracket
168: rubber mount
186a, 186b: strand wire
188a, 188b: rubber cover

FIG. 1

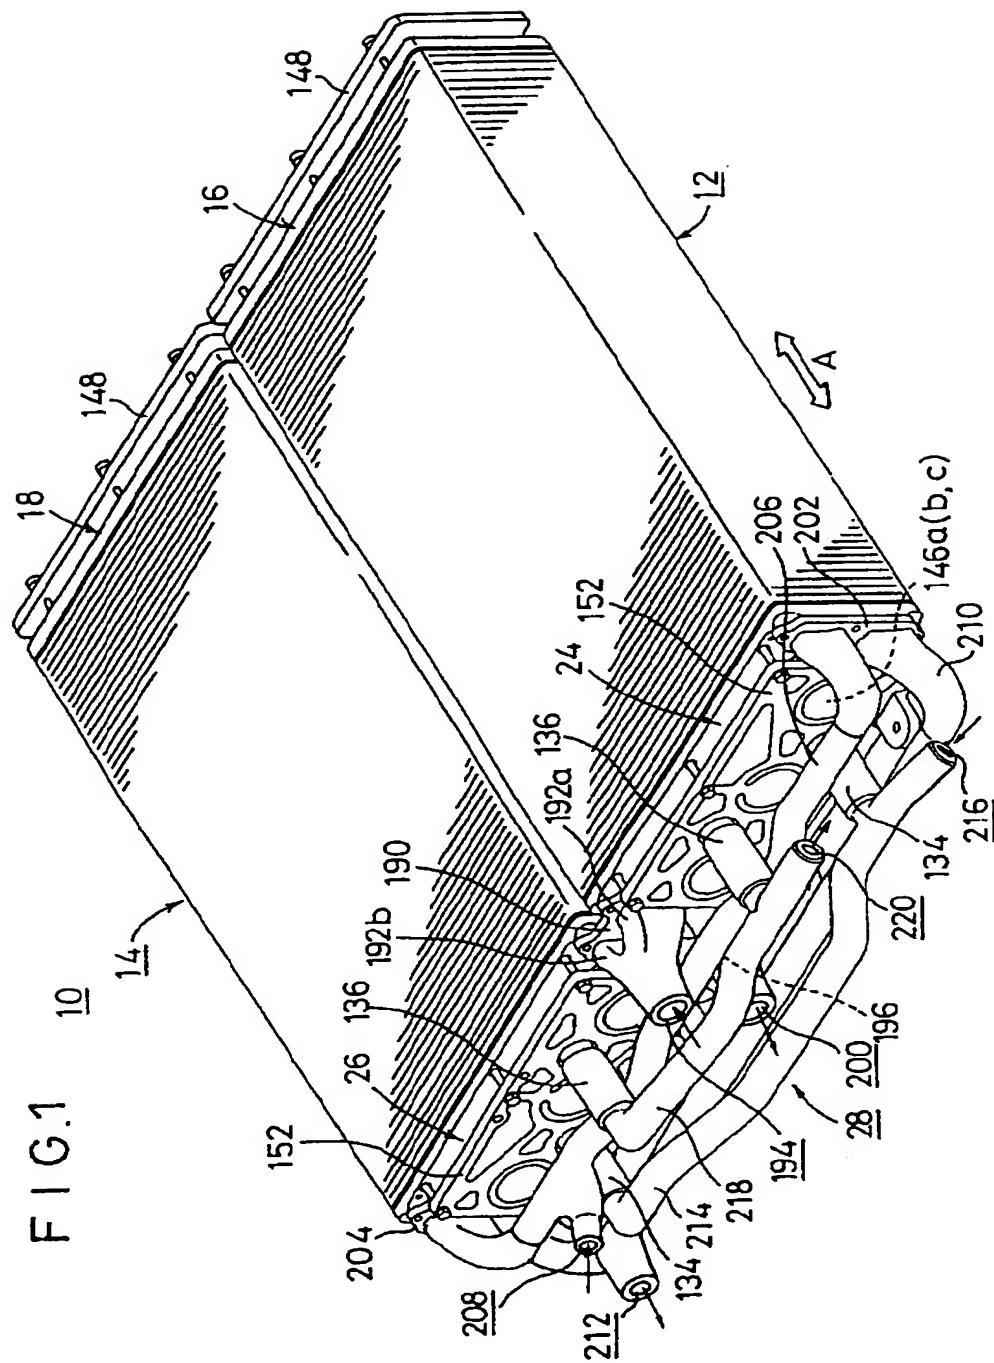


FIG. 2

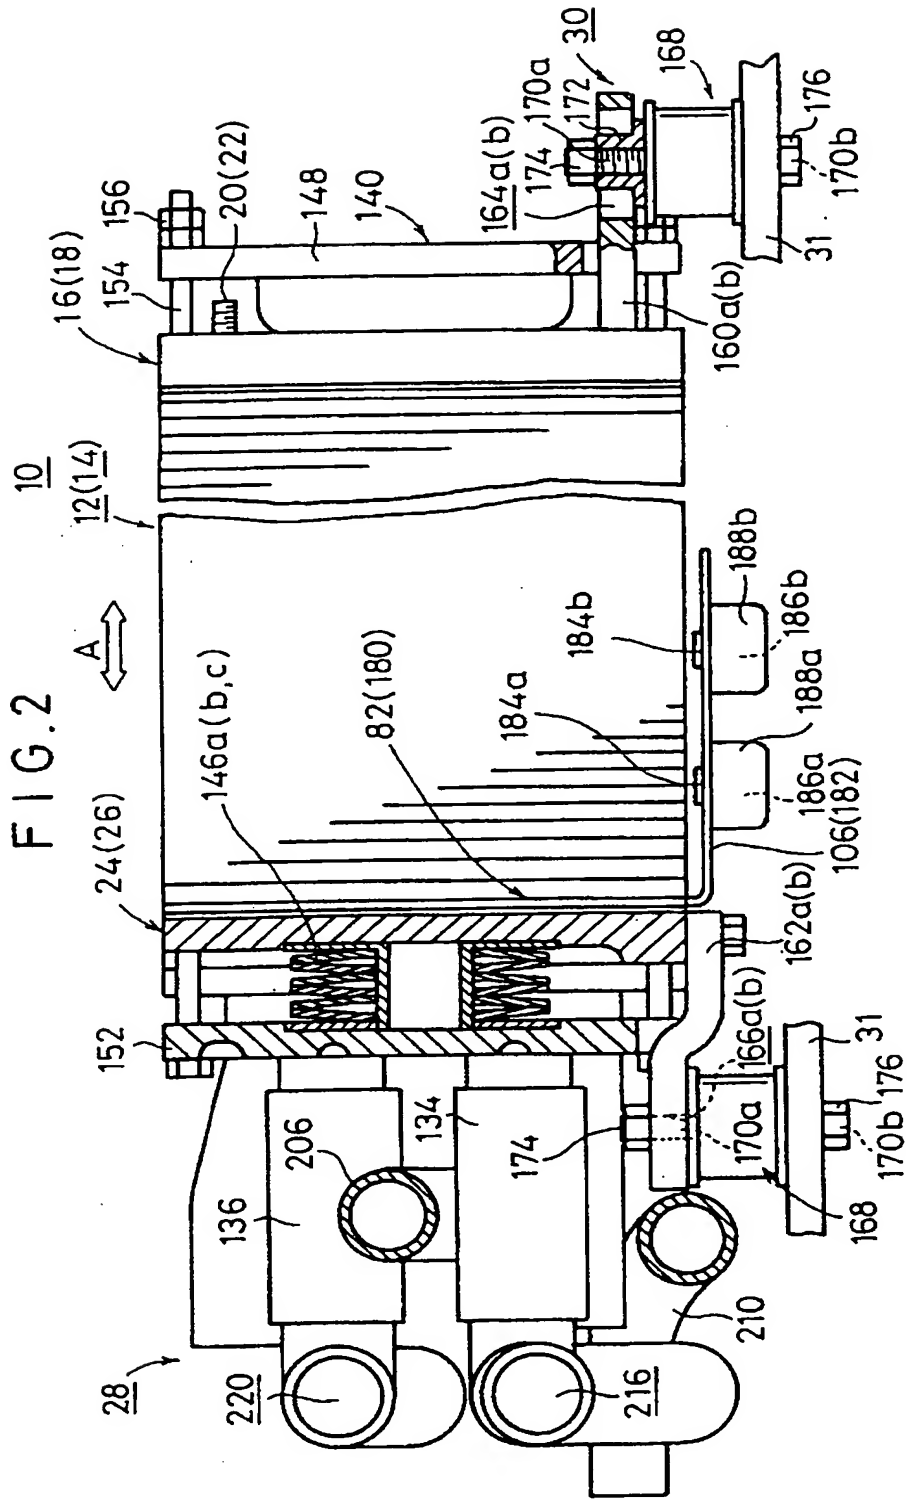


FIG. 3

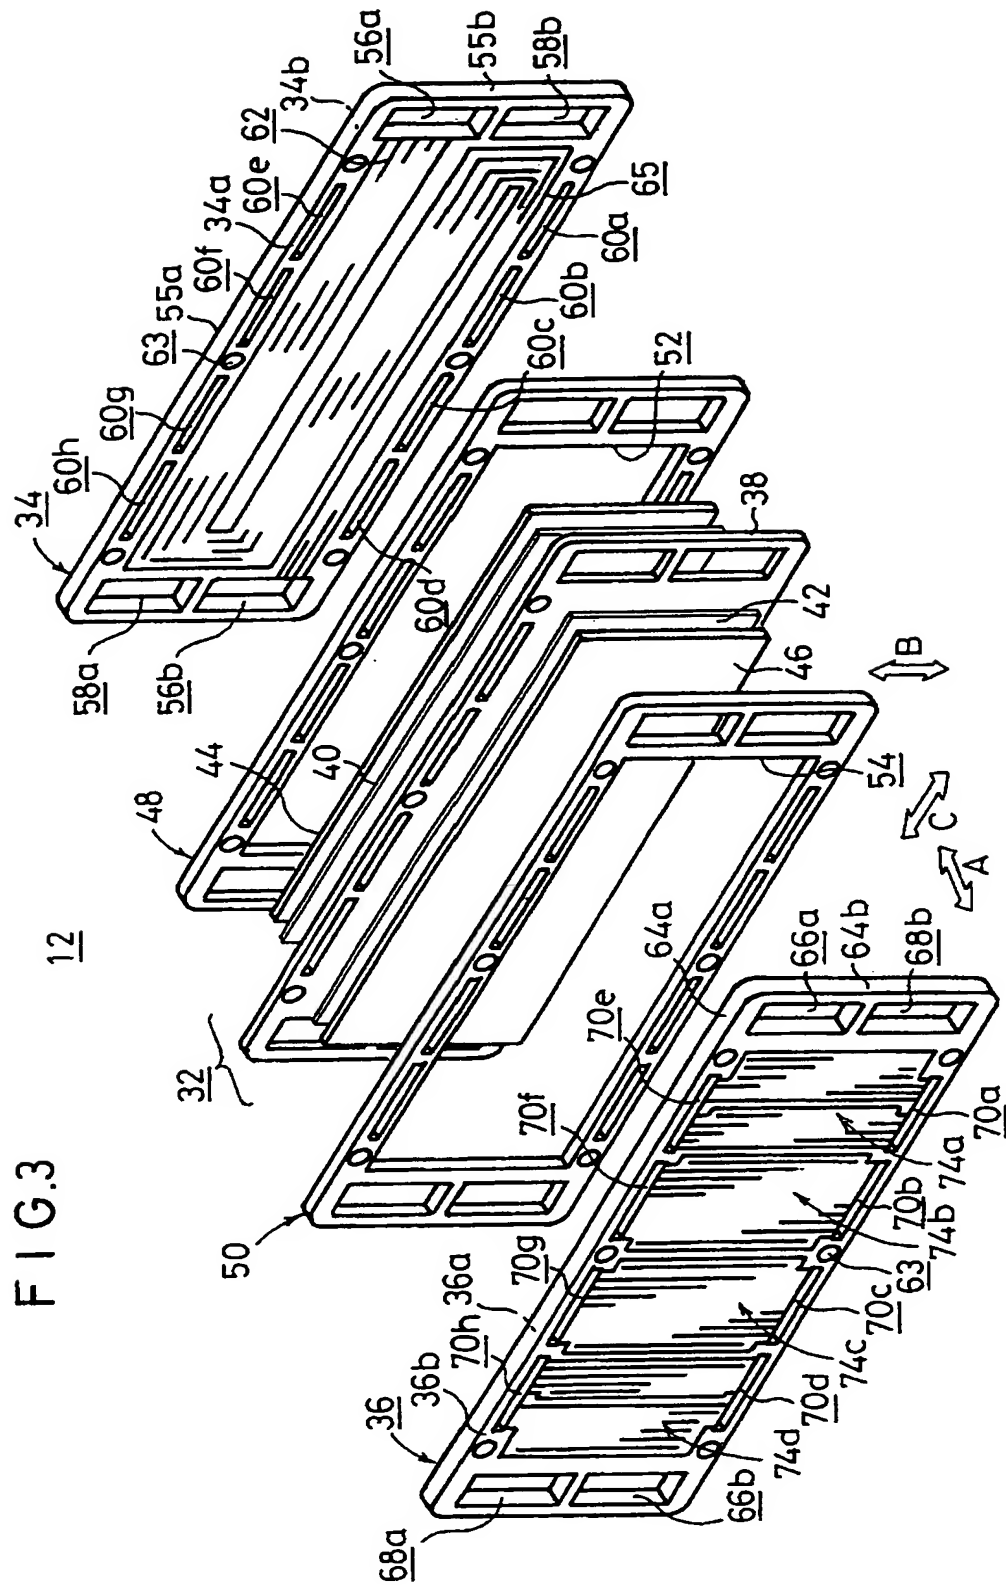


FIG. 4



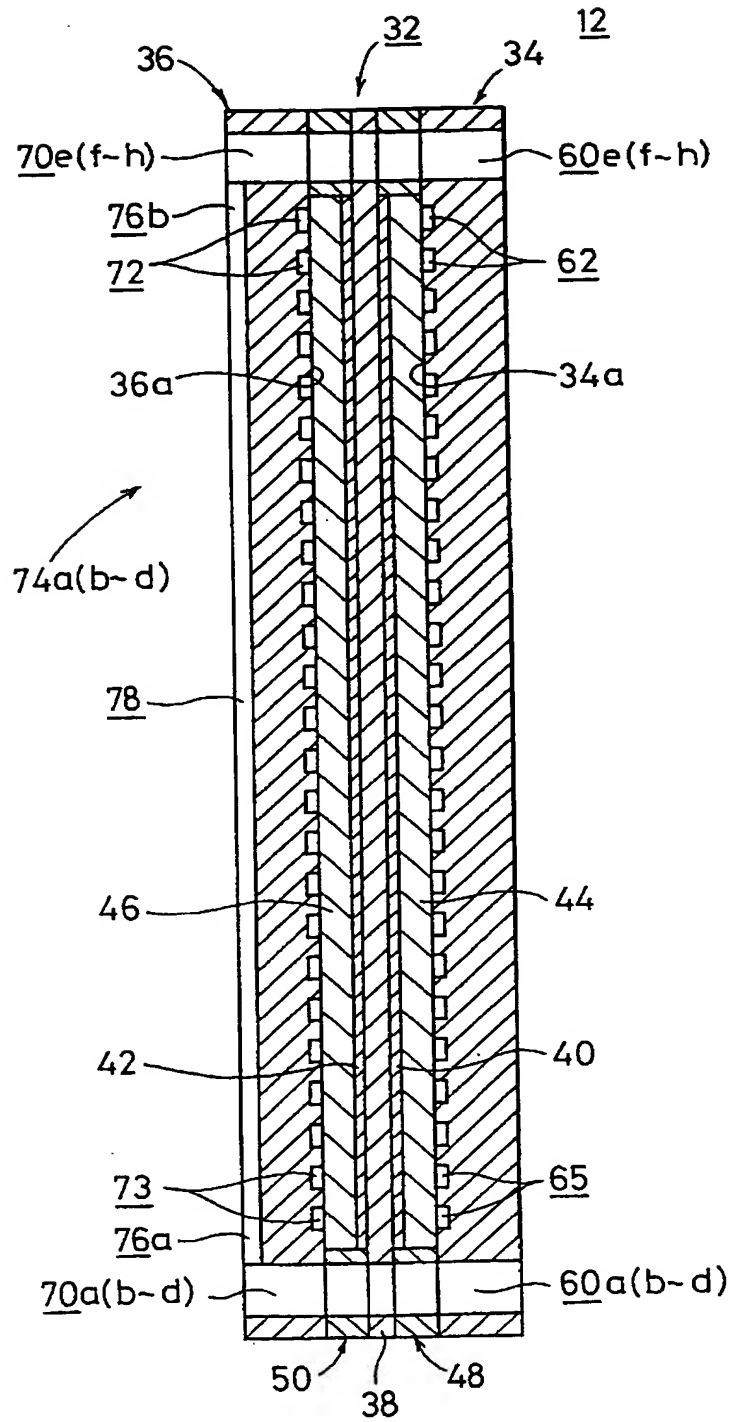


FIG. 5

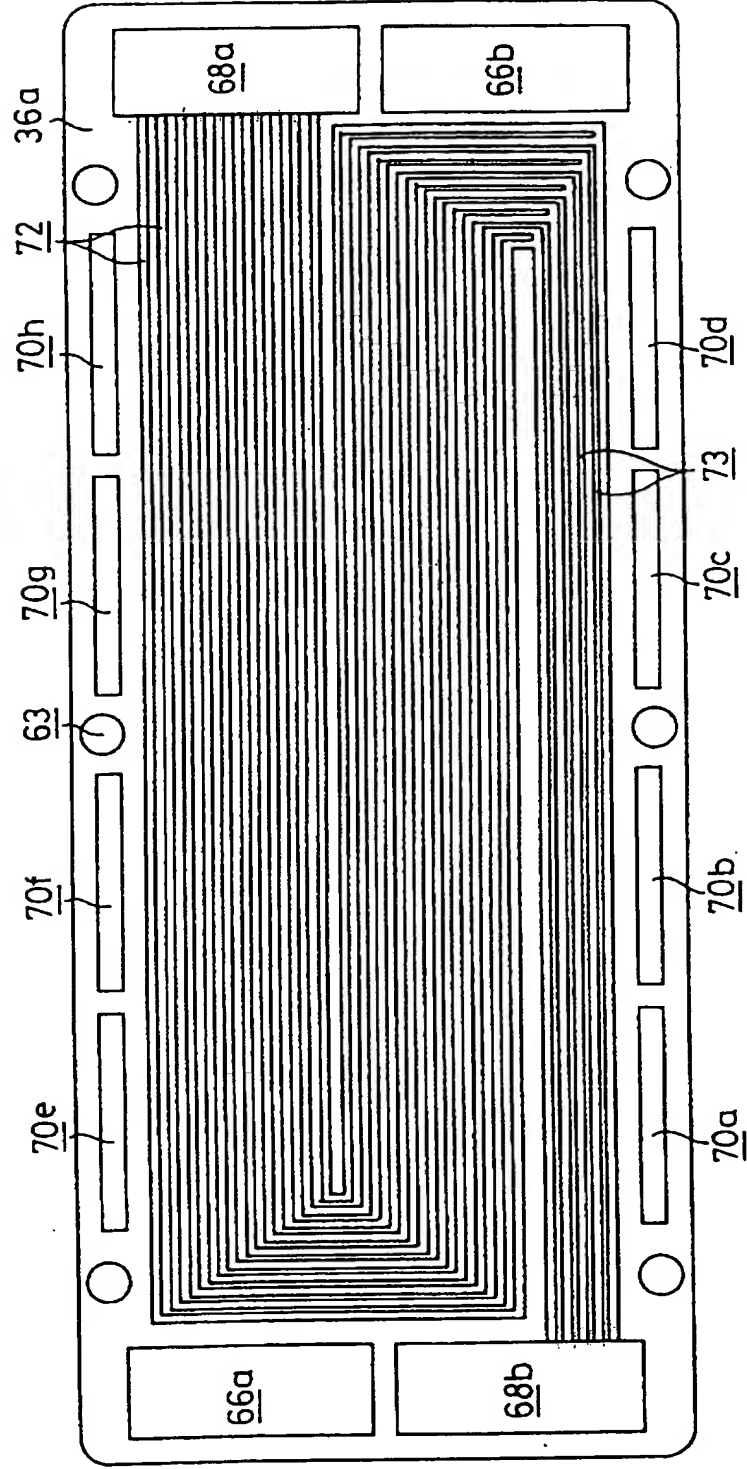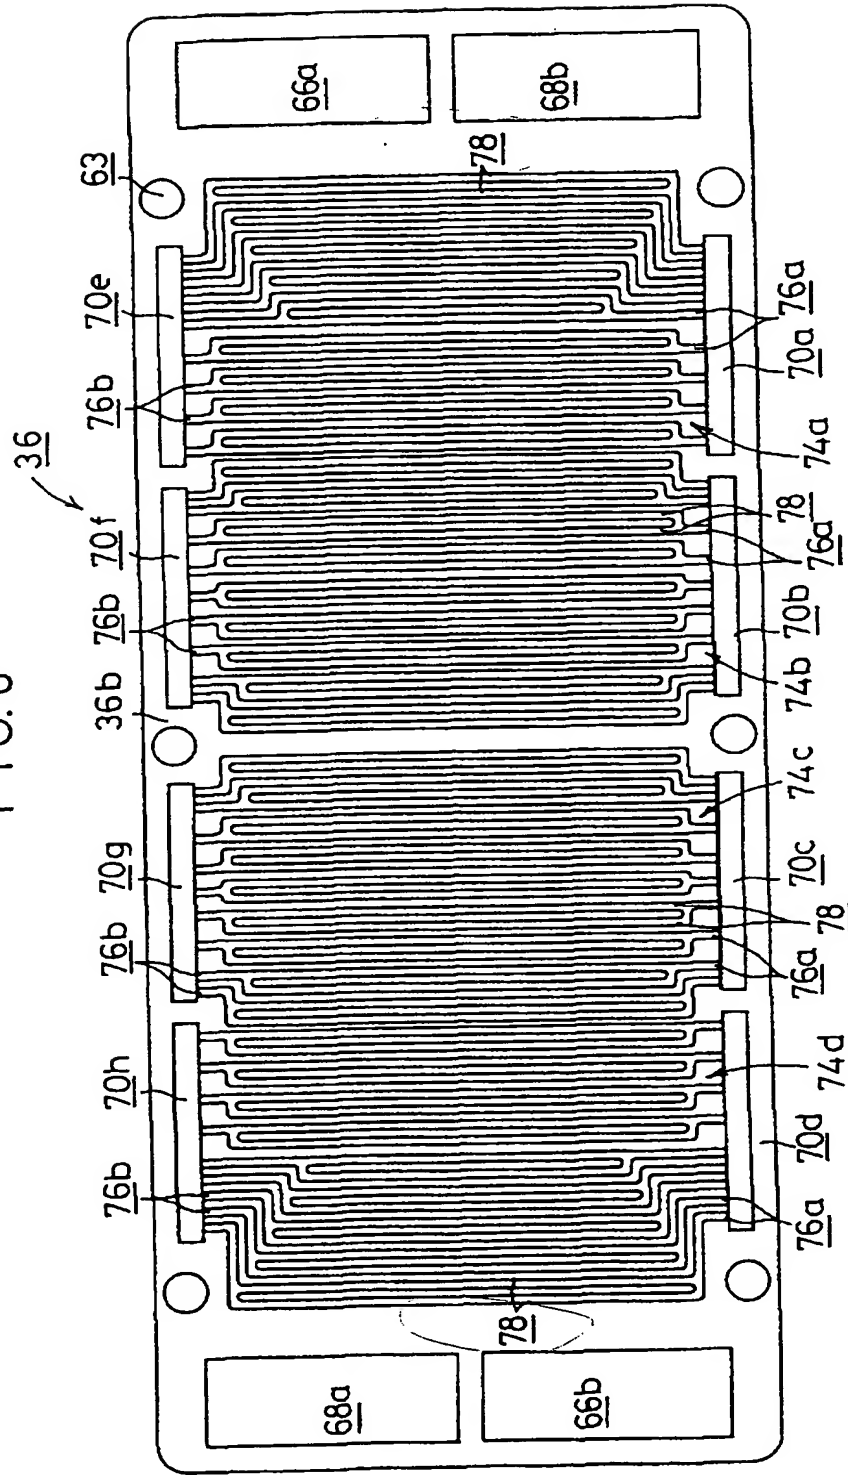

FILE



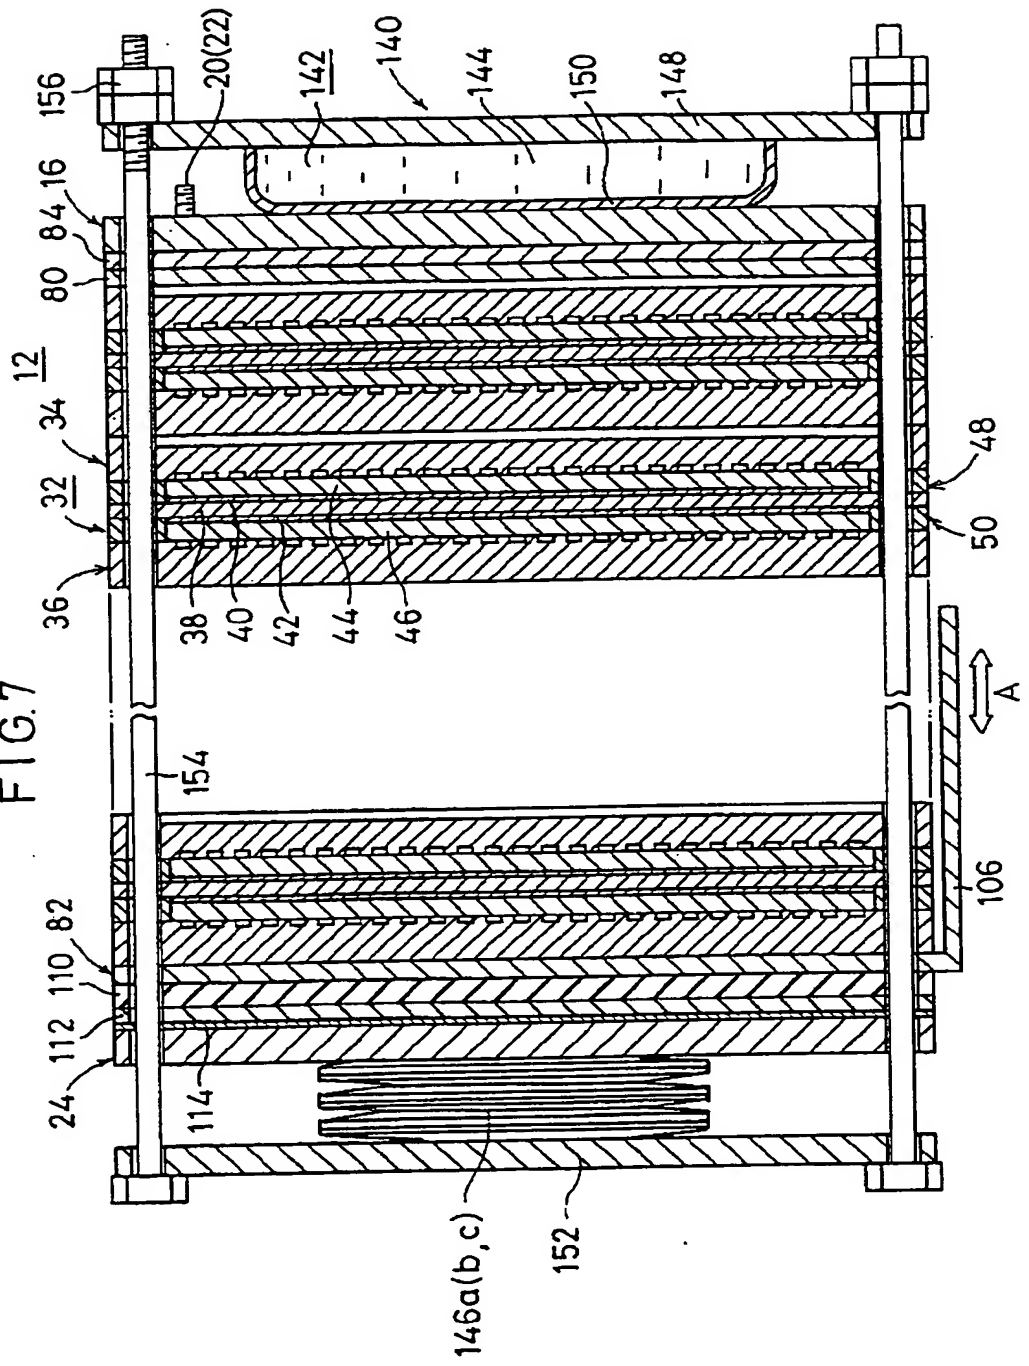


FIG. 8

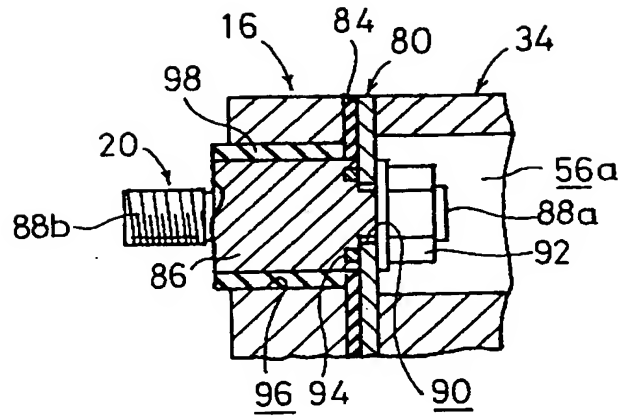


FIG. 9


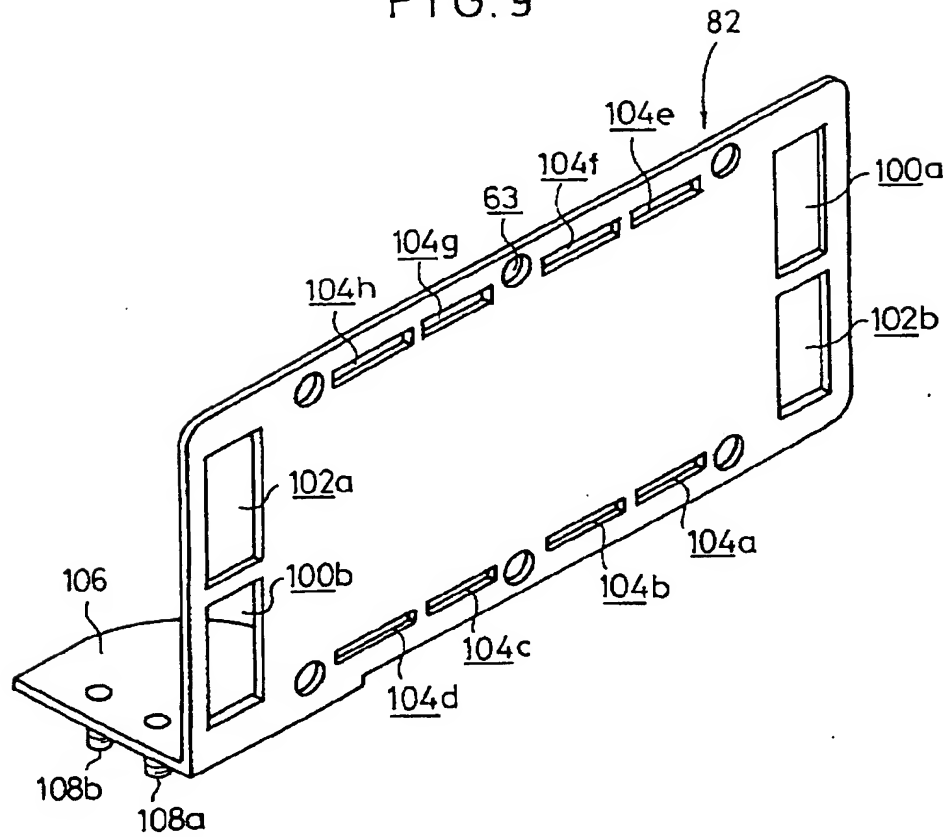


FIG. 10

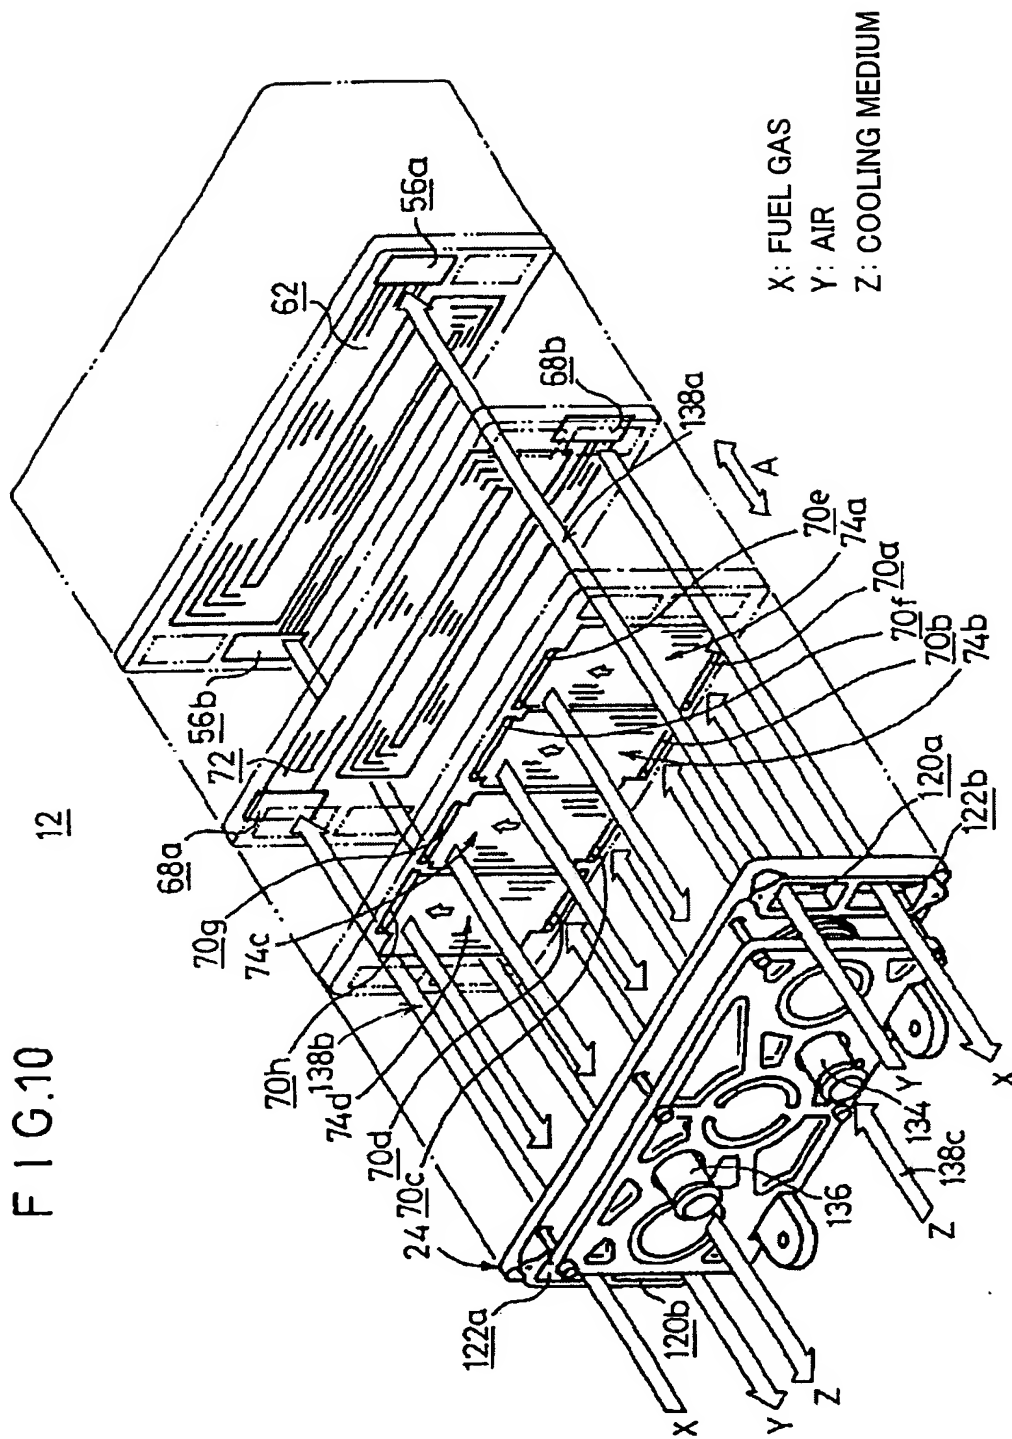

X: FUEL GAS
Y: AIR
Z: COOLING MEDIUM

FIG.11


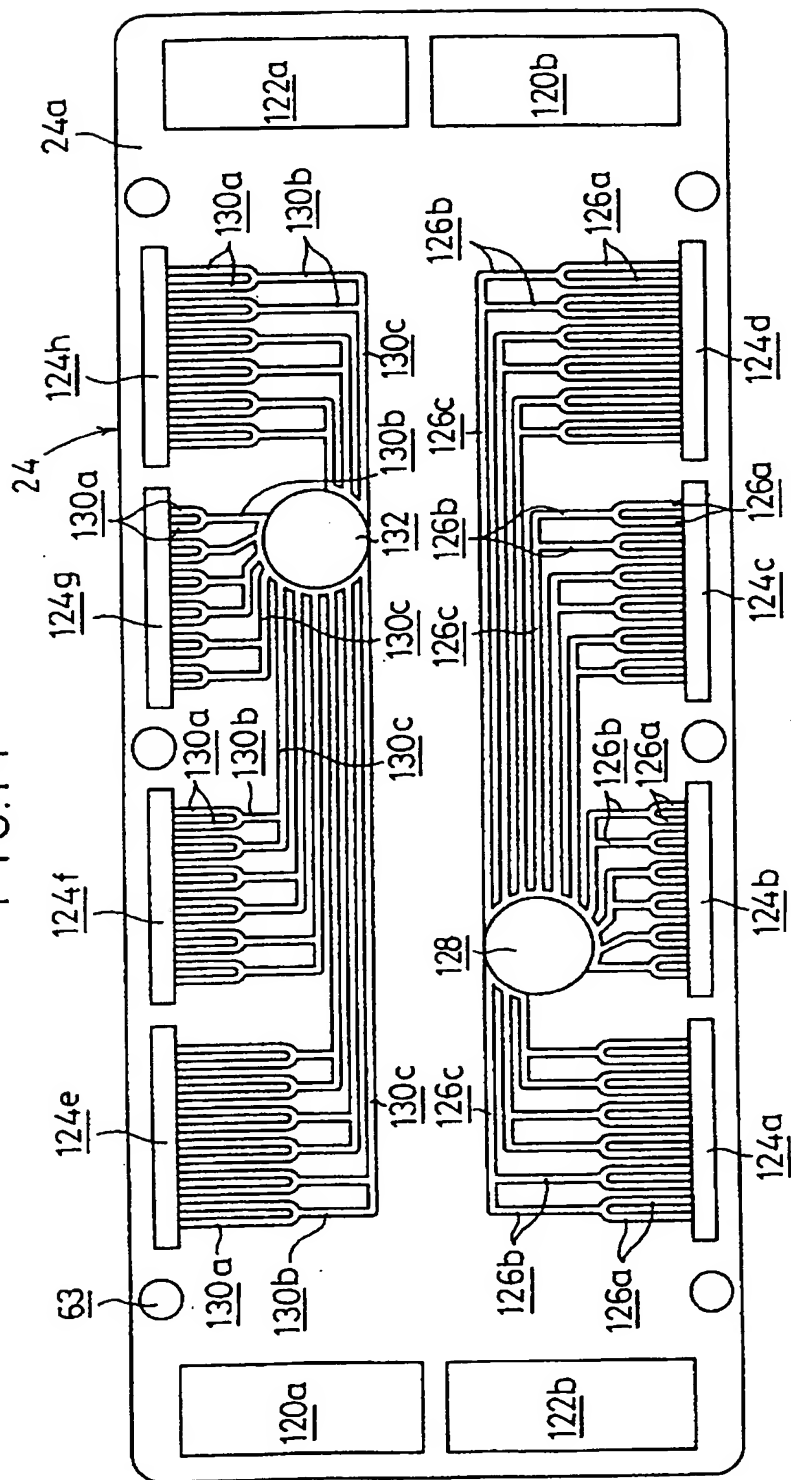


FIG.12

12

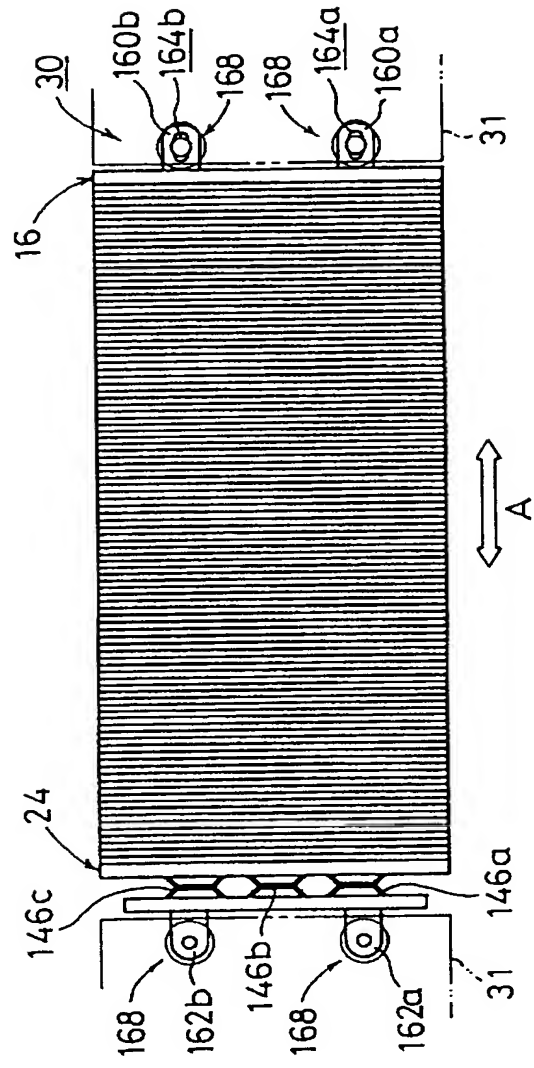

101

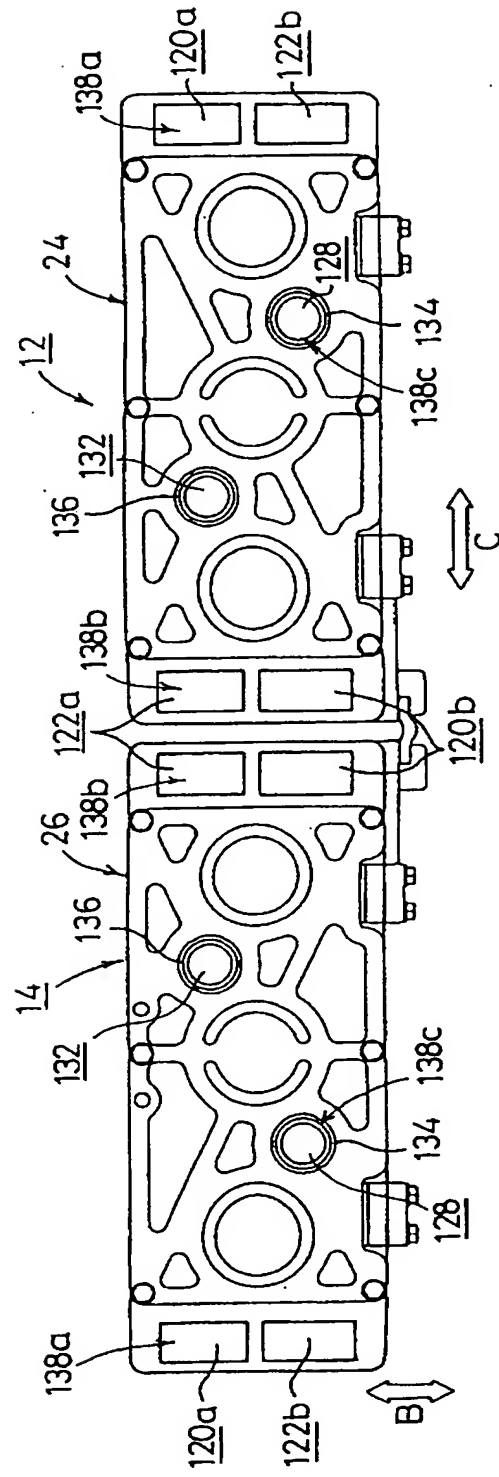
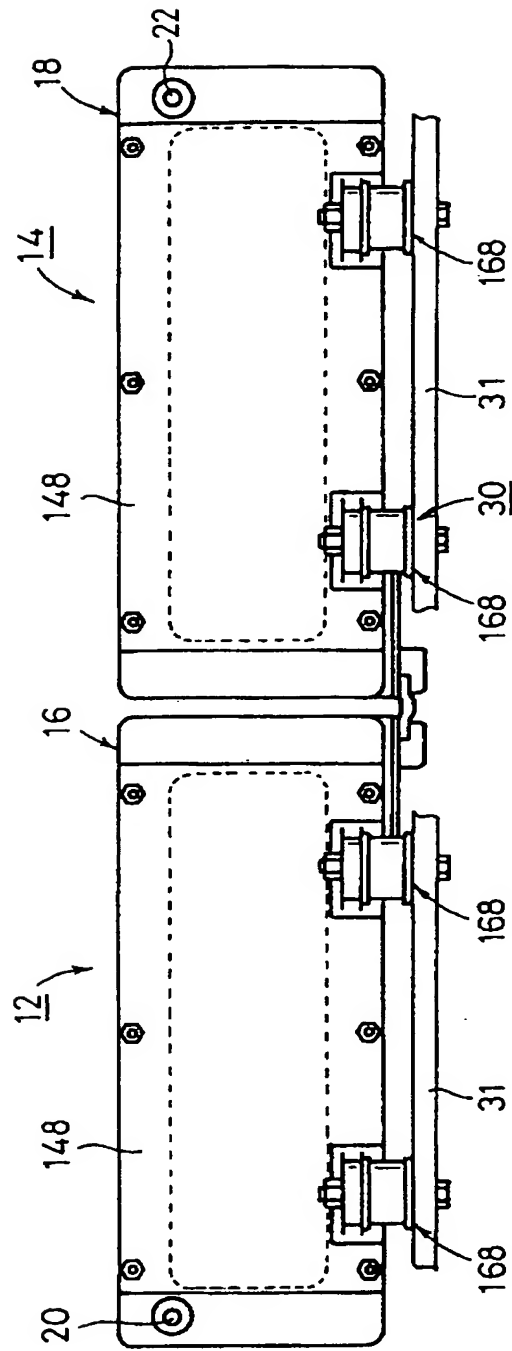


FIG. 14

10




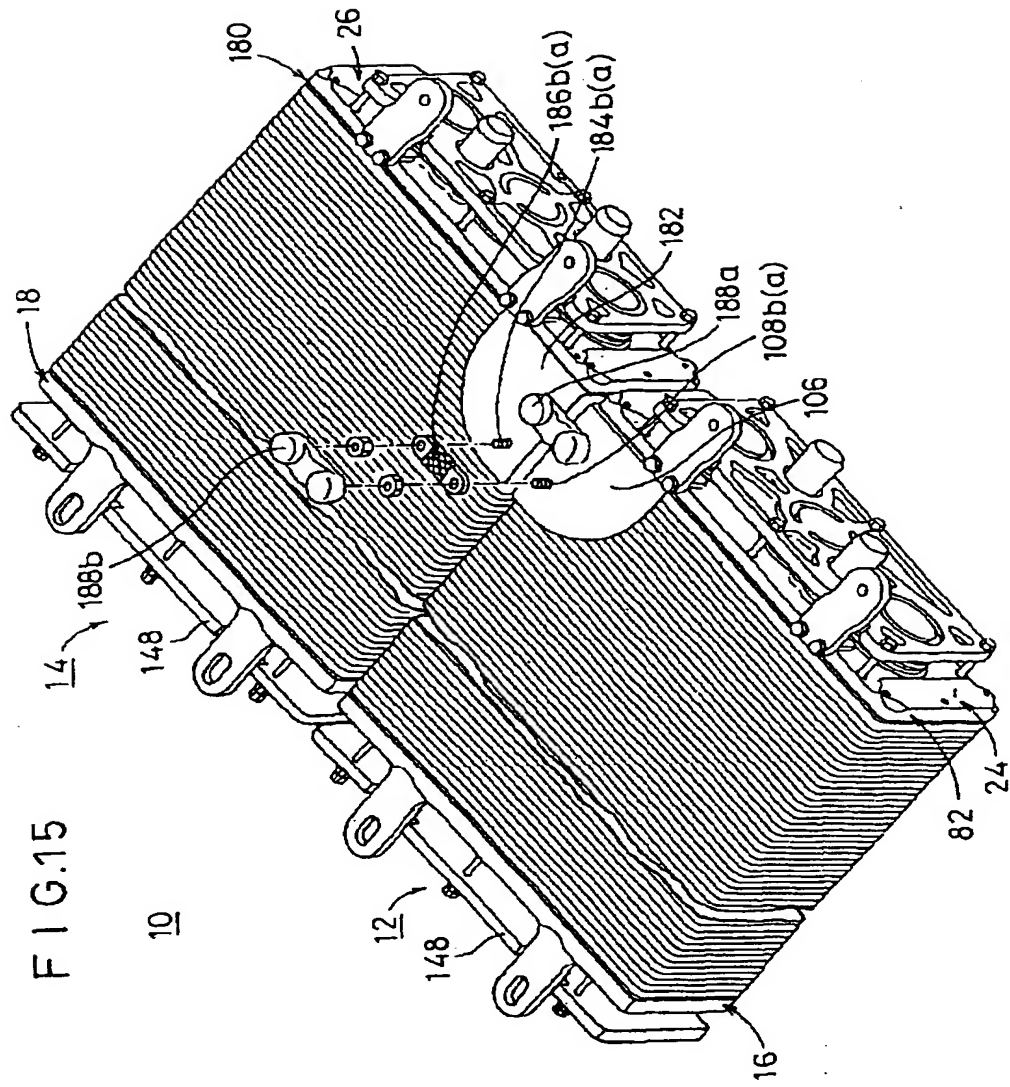


FIG. 16

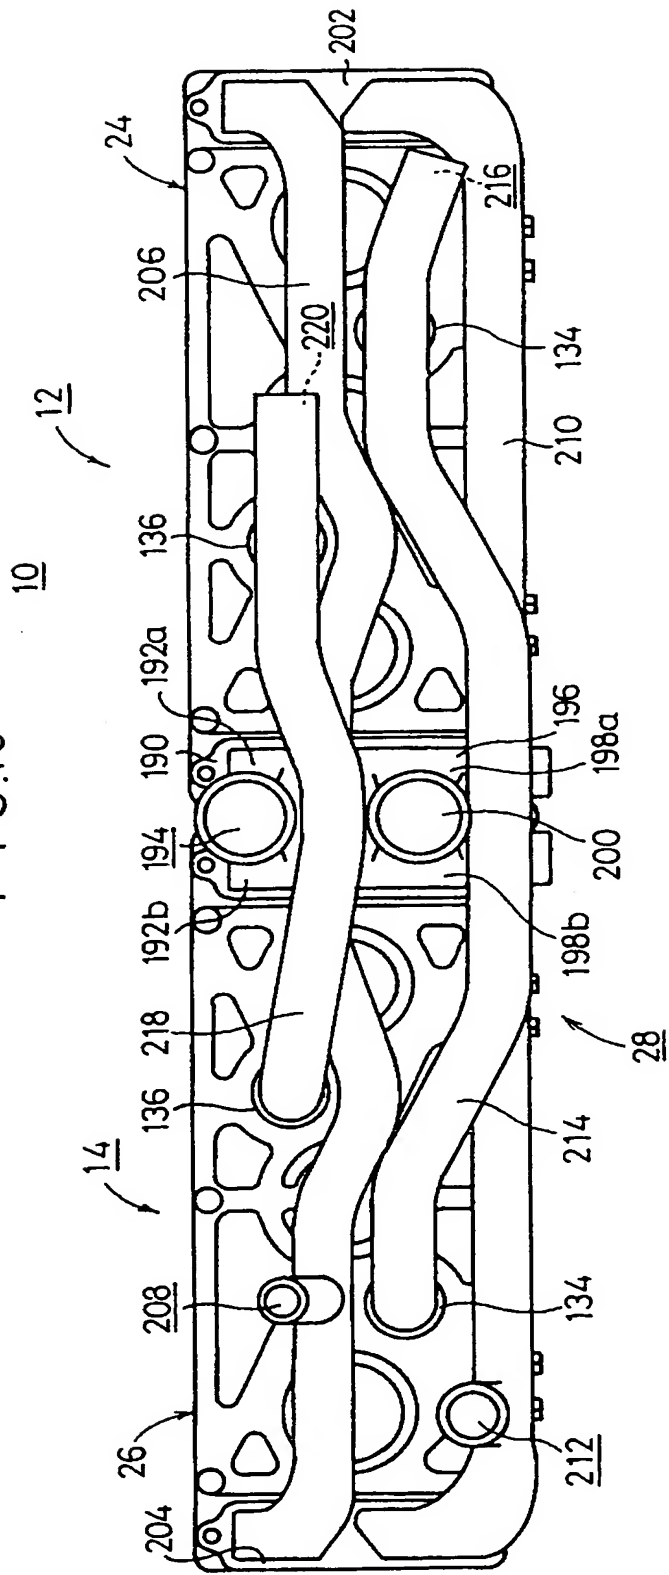

[DOCUMENT NAME] Abstract

[ABSTRACT]

[TASK] To simplify the piping structure of first and second fuel cell stacks which are arranged in parallel to one another and to allow the dimension in the height direction of the fuel cell stacks to be effectively shortened.

[SOLUTION] An oxygen-containing gas supply/discharge passage 138a, a fuel gas supply/discharge passage 138b and a cooling medium supply/discharge passage 138c are provided symmetrically respectively in each of the first and second fuel cell stacks 12, 14. Further, an oxygen-containing gas inlet 120a, a fuel gas inlet 122a, an oxygen-containing gas outlet 120b, a fuel gas outlet 122b are disposed at upper and lower portions at both ends in a lateral direction and provided on the identical vertical surfaces of the first and second fuel cell stacks 12, 14. A cooling medium supply port 216 and a cooling medium discharge port 132 are provided at the inner positions in the upper and lower directions and in the right and left directions.

[SELECTED FIGURE] FIG. 13